


XCR70H 越野轮胎起重机 / Rough Terrain Crane

技术规格书


Technical specifications



70t



45m



57.9m





2022年9月 第1版

目录
Contents

目录
Contents

尺寸参数 Dimensions	4
技术规格 Technical specifications	5-6
重量/作业速度 Weight / Working speeds	7
平衡重 Counterweight	8
臂架组合方案 Boom / Jib combinations	9-10
主臂 Boom	11-12
副臂 Jib	13-14
符号标识 Description of symbols	15
主要技术参数表 Table of main technical parameters	16-17
注意事项 Notes	18

尺寸参数
Dimensions

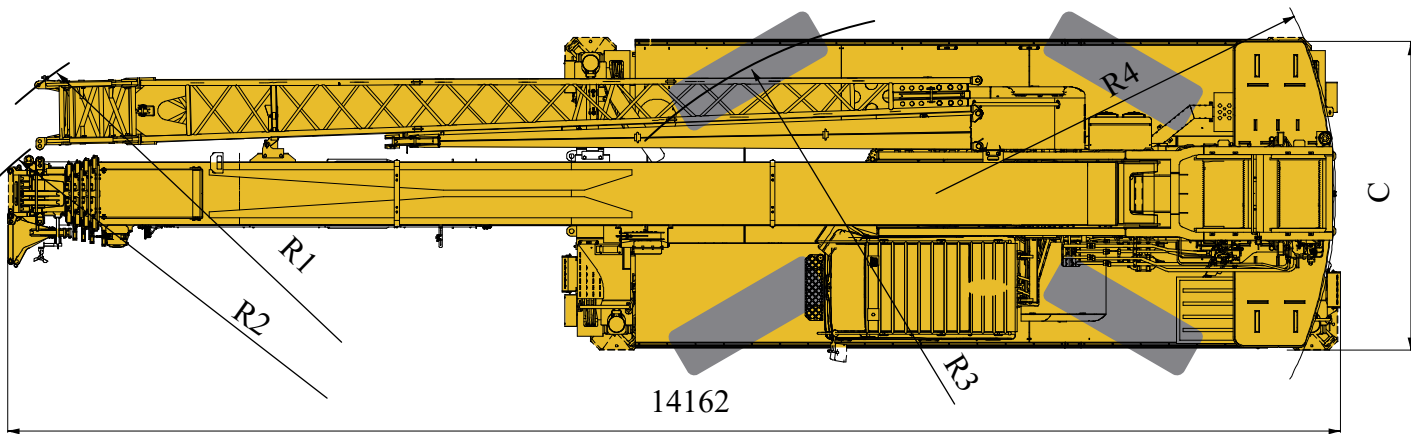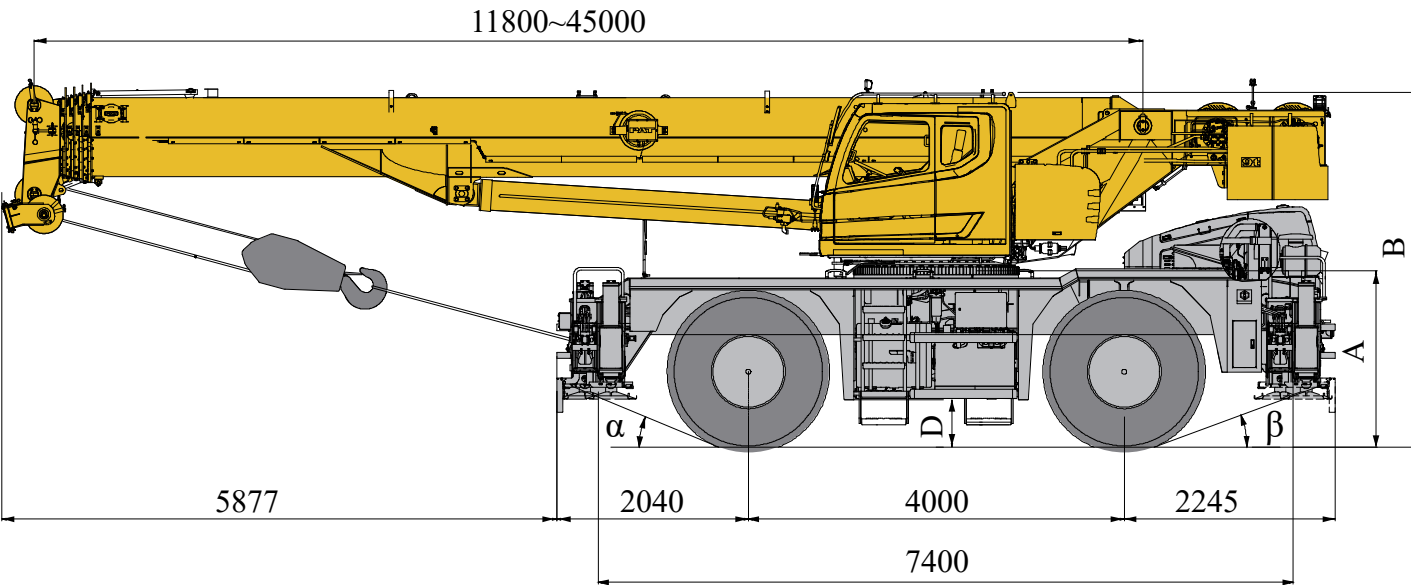

	α	β	A	B	C	D	R1	R2	R3	R4
26.5R25	23°	20°	1899	3795	3290	508	11445	11247	6500	4200

技术规格

Technical specifications

		配置
主臂	1节基本臂和4节伸缩臂，U形截面的焊接结构，双缸绳排伸缩机构。臂头标配6个滑轮。 主臂长度：11.8m~45m。	●
副臂	共两节，一节桁架式结构，二节箱型结构，0°、15°和30°三种安装角度，安装在主臂侧面。 副臂长度：9.5m~16m。	●
车架	车架采用细晶粒高强度钢焊接而成，抗扭转大截面框架结构，承载能力强。	●
支腿	4支腿，H型布置，位于车架两端，由电控液压控制。	●
发动机	QSB6.7-C260-30，直列六缸水冷压燃式柴油发动机，东康制造，额定功率 194/2200(kW/(r/min))，最大输出扭矩 990/1500(N.m/(r/min))，非道路三阶段 EU Stage IIIA 排放标准 燃油箱有效容积：约305L。	●
变速箱	6WG210，德国ZF自动变速箱，6个前进档，3个倒档。	●
车桥	前后桥均为转向驱动桥，承载能力大。	●
悬挂	前桥与车架刚性连接； 后桥采用摆动式液压悬架，公路行驶具有减震功能，缓冲路面冲击；吊重行驶时后悬架油缸锁止至刚性状态，增加作业稳定性。	●
轮胎	4个专用越野轮胎，每桥均装单胎，承载能力大。 轮胎规格：26.5R25。	●
转向	具有前桥独立转向、小转弯转向、蟹行转向和后桥独立四种转向功能。	●

制动	行车制动：双回路全液压盘式制动，作用于所有车轮；当系统压力过低时，具有自动报警。 驻车制动：弹簧加载、液压解除的独立盘式制动器，作用于前桥。	●
液压系统	双变量柱塞泵用于起升、变幅、伸缩，齿轮泵用于回转、支腿、转向、制动等动作；主阀采用负载敏感式比例多路换向阀；配置独立的液压油散热器； 液压油箱容积：约1240L。	●
操纵方式	液控先导操纵系统，由左右2个操纵手柄控制起重机的主要动作。	●
电气系统	直流24伏特，2块12伏电瓶串联。 配有力矩限制器和前照灯、转向灯、倒车灯、转台工作灯、吊臂工作灯、回转警示灯等。	●
主、副起升机构	由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。	●
回转机构	单排四点接触球式回转支承，液压马达驱动内置行星齿轮减速器，减速机配备常闭式制动器。	●
司机室	翻转式司机室，滑移式车门，可调式座椅，装有安全玻璃、顶部保护栏，前风窗及顶部装有遮阳帘。 配置冷暖空调、收音机、12V和24V电源接口。	●
安全装置	配有液压平衡阀、溢流阀、双向锁、LMI；三圈保护器，防止钢丝绳过放；臂头设置高度限位器、防止钢丝绳过卷。	●
平衡重	总重9t	●
吊钩	55 t 吊钩，5t 吊钩。	●
CE选装包		○

● —— 表示标准配置；
○ —— 表示选装配置。

技术规格

Technical specifications



Boom	1 base boom and 4-telescoping sections, U-shape cross section welded structure. Double cylinder plus ropes telescoping mechanism. 6 sheaves on boom head are standard. Boom length: 11.8 m ~ 45 m.	●
Jib	Two sections with one lattice structure and one box-type structure. Three offset angles of 0°, 15° and 30° are available. It is stowed along the side of the boom. Jib length: 9.5 m ~ 16 m.	●
Frame	Made of high strength fine grained steel, welded torsion-resistant frame type construction with large cross-section, high load-bearing capacity.	●
Outrigger	4 outriggers, H-shaped arrangement, which are controlled by electrical and hydraulic and located at both sides of chassis frame.	●
Engine	QSB6.7-C260-30, in line, six-cylinder water-cooled compression ignition diesel engine, manufactured by Dongfeng Cummins, with rated power of 194/2200(kW/(r/min)), max. torque of 990/1500 N.m/(r/min)), off-road EU Stage IIIA emission standard compliant Fuel tank capacity: approx. 305 L	●
Transmission	6WG210, automatic transmission from ZF Germany, with 6 forward and 3 reverse gears	●
Axles	Both front and rear axles are for driving and steering, and the axles have features of great load bearing capacity	●
Suspensions	Front axle is locked with frame; rear axle is equipped with swing hydraulic suspensions, which have cushioning function when driving on roads; the rear suspension cylinder may be locked so as to meet the requirement for travel with a load suspended, increasing operation stability.	●
Tires	Four specialized off-road tires. Each axle is equipped with a single tire, with large load bearing capacity. Tire specifications: 26.5R25.	●
Steering	Front axle independent steering, all wheel steering, crab steering and rear axle independent steering modes are available.	●

Brakes	Service brake: double-circuit hydraulic disc brake, acting on all wheels. Automatically warning is available when the pressure in braking system is too low. Parking brake: spring-loaded brake, acting on front axles, hydraulic-released independent disc brake.	●
Hydraulic system	The dual-variable piston pump, used for lifting, luffing and telescoping operations, and a gear pump, used for slewing, outrigger, steering and braking operations; a load sensitive proportional multi-way change valve is used as main valve; an independent hydraulic oil radiator. Tank capacity: approx. 1240 L.	●
Operating mode	Hydraulic controlled pilot operation system is equipped with two levers controlling the main movements of the crane.	●
Electrical System	24 V DC, two sets of 12 V battery in series. It also equipped with LMI, headlight, turning light, reversing light, turntable working light, boom working light and slewing warning light.	●
Main and auxiliary winch system	The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake and a counterbalance valve equipped.	●
Slewing system	Single-row four-point ball contact slewing ring, driven by a hydraulic motor through planetary gear reducer, and with a normally closed brake fitted.	●
Operator's cab	Tilttable cab, with sliding door and adjustable seat equipped. It is equipped with safe glass and roof protective grille. Sun shade is available for windshield and roof window. HVAC, radio, 12 V and 24 V DC outlets are standard.	●
Safety devices	Hydraulic counterbalance valve, relief valve, double-way lock and LMI. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding.	●
Counterweight	Total 9 t.	●
Hook Block	55 t hook block, 5 t hook block	●
Optional package for CE certification		○

Symbol explanation:

- —it means the standard configuration;
- —it means the optional configuration.

重量
Weight



车桥 Axle	1	2	整车总重量 Gross vehicle weight
t	24.252	22.503	46.755



吊钩 Hook	倍率 Parts of lines	吊钩重量 Weight (kg)	备注 Remarks
55t	10	502	单钩 Single hook
5t	1	158	单钩 Single hook

作业速度
Working speeds




26.5 R 25	38	70%
-----------	----	-----



作业机构 Lifting mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-150 m/min, 空载, 第四层 m/min, no load, 4th layer	61kN	20mm/215m
	0-90 m/min, 空载, 第四层 m/min, no load, 4th layer	61kN	20mm/140m
	0-1.5r/min		
	从-1.5°抬起至80°约50s Approx. 50s for boom luffing from -1.5° to 80°		
	从11.8m伸出至45m约90s Approx. 90s for boom extending from 11.8m to 45m		

平衡重

Counterweight

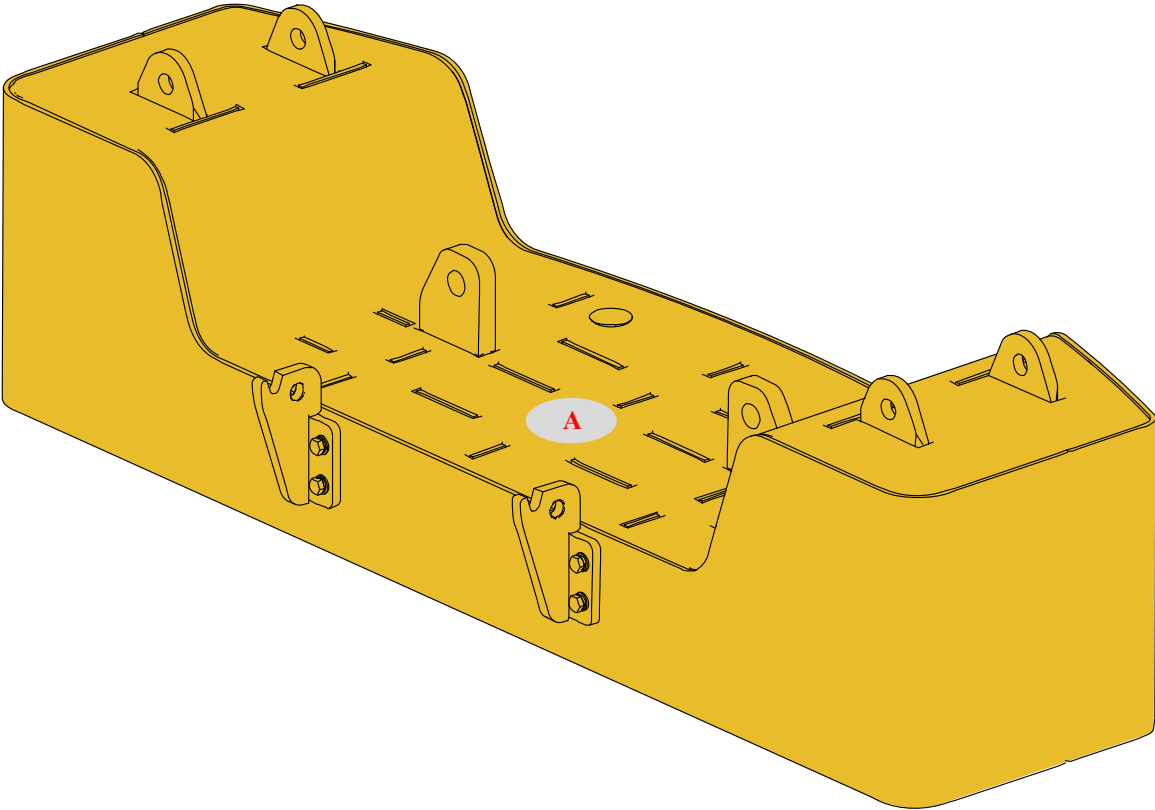


平衡重 Counterweight	A	
尺寸 (长×宽×高) mm Dimension (L×W×H) mm	3270×1070×915	
重量 t Weight t	9	

工况模式 Operation mode	0t	9t
组合形式 Combinations	—	A

臂架组合方案

Boom / Jib combinations

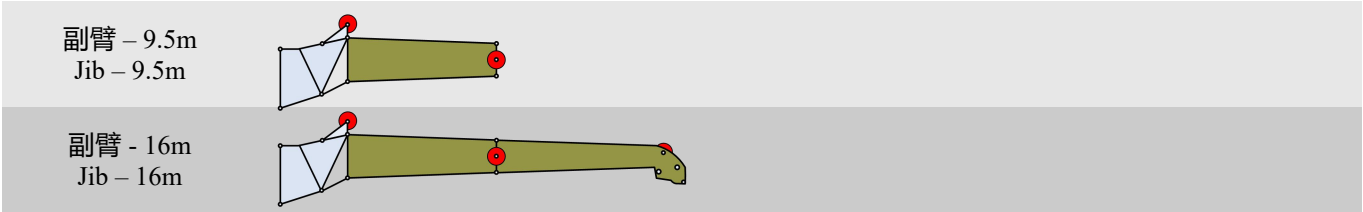


部件 Component	结构形式 Structure	尺寸 (长×宽×高) mm Dimension (L×W×H) mm	重量 kg Weight (kg)
一节、二节副臂总成+连接架 First and second jib section assembly + Connecting bracket		折叠 (Folded) : 10150×837×1263	1050

臂架组合方案

Boom / Jib combinations



主臂 Telescopic boom	主臂 + 一节副臂 Telescopic boom + First jib section	主臂 + 两节副臂 Telescopic boom + First and second jib sections
11.8~45m	45m+9.5m	45m+16 m

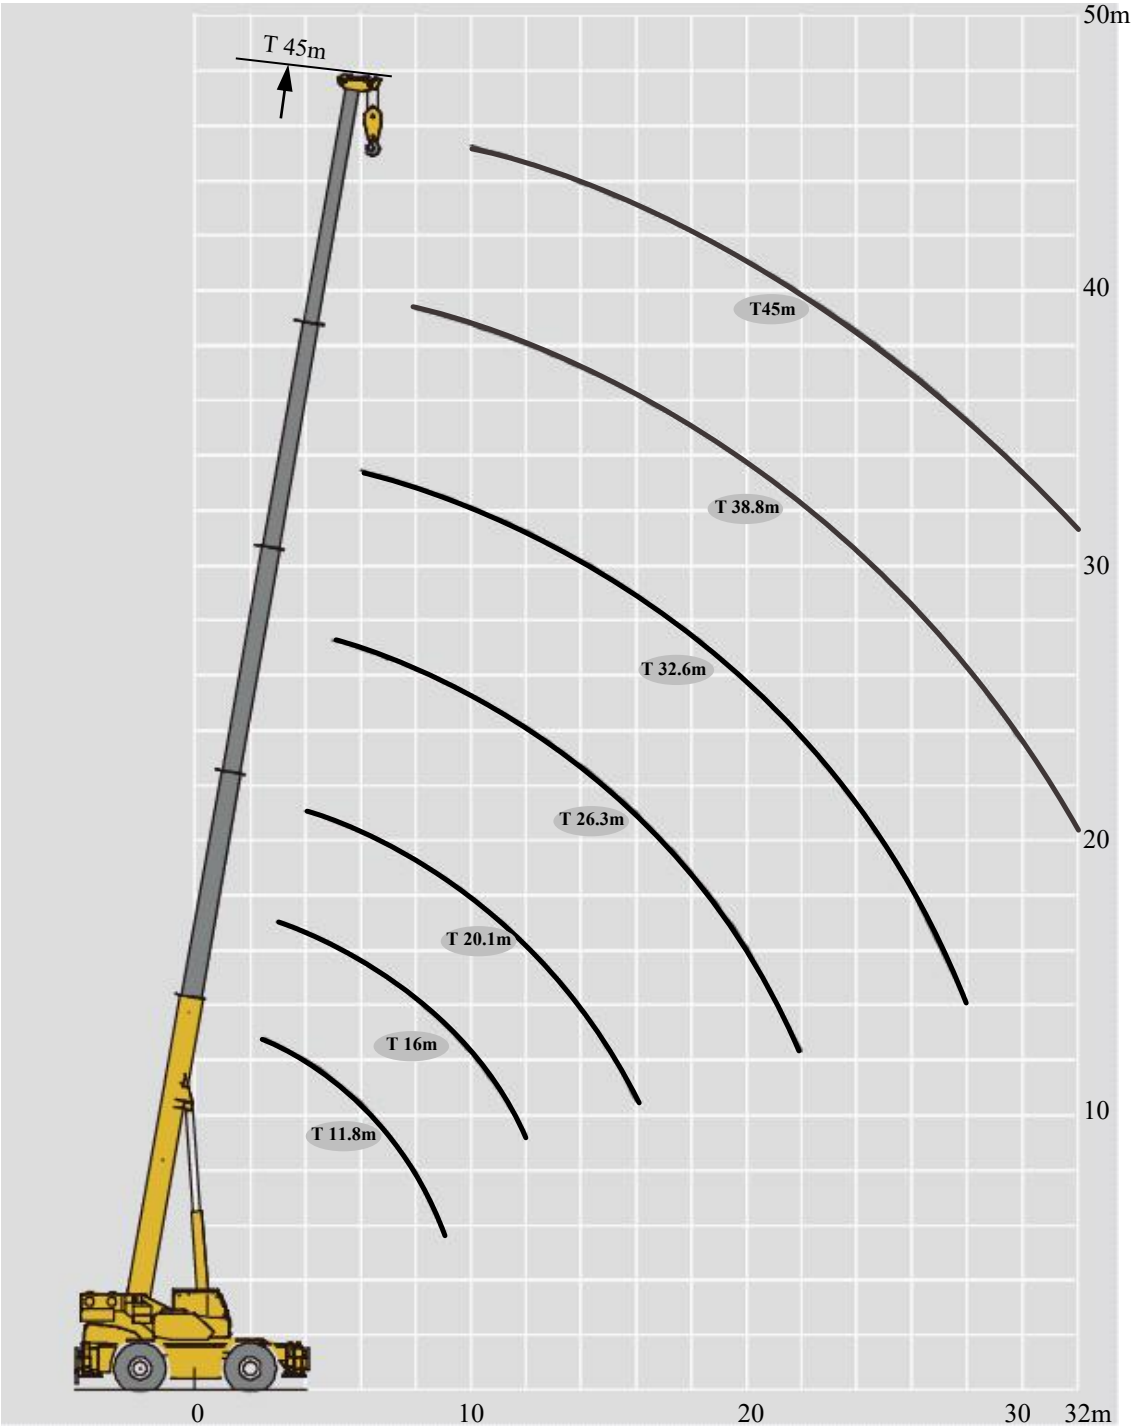


起重性能表
Lifting capacities

T 11.8~45m



	11.8-45m T 7.4m×7.4m 360° 9t															
	11.8m	16.0m	20.1m	26.3m	32.6m	38.8m	45m	18.0m	24.3m	30.5m	36.7m	22.2m	28.4m	34.6m	40.9m	
2.5	70*															2.5
3	60	42.5						27.5								3
3.5	55	43.5						28.0								3.5
4	50	45	37					28.5	20.0			27.0				4
4.5	46	43	37					28.5	20.0			27.0				4.5
5	40	40	33.5	27				28.5	20.0			27.0	21.0			5
6	33.5	33.3	31.5	25.4	19			28.5	20.0	12.5		27.0	21.0			6
7	27.5	27.5	27.4	23.9	17.8			27.5	20.0	13.4		27.0	21.0	12.5		7
8	23.5	23.5	23	21.8	17.4	12		23.5	20.0	13.4		24.0	21.0	13.3		8
9	20	20	20	19	17	11.5		20.0	19.8	13.4		20.0	20.7	13.3		9
10		16.5	16.2	17	16.5	11.2	9.3	18.3	18.5	12.4	5.0	17.7	16.9	13.3		10
12		11.4	11.1	12.2	13.2	10.2	8.8	13	13.7	10.8	5.0	12.5	12	11.9		12
14			8	9.1	9.7	9.7	8.5	9.8	10.4	9.6	8.5	9.3	9	10.4	6.5	14
16			5.9	6.9	7.5	7.9	7.8		8.2	8.6	7.5	7.2	7	8.2	8.0	16
18				5.3	5.9	6.3	6.6		6.6	7	6.7	5.6	5.5	6.6	6.8	18
20				4.2	4.7	5.1	5.4		5.4	5.8	6.0		4.3	5.4	5.6	20
22				3.2	3.8	4.1	4.4			4.8	5		3.5	4.4	4.7	22
24					3	3.4	3.6			4.1	4.2		2.8	3.7	3.9	24
26					2.2	2.8	3			3.4	3.6			3	3.3	26
28					1.7	2.2	2.5				3.1			2.5	2.7	28
30						1.7	2				2.6			2.1	2.2	30
32						1.3	1.5								1.9	32
二节臂 2nd	0	50%	100%	100%	100%	100%	100%	0%	0%	0%	0%	50%	50%	50%	50%	二节臂 2nd
三节臂 3rd	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	三节臂 3rd
四节臂 4th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	四节臂 4th
五节臂 5th	0	0	0	25%	50%	75%	100%	25%	50%	75%	100%	25%	50%	75%	100%	五节臂 5th



*70t需使用臂端单滑轮与主臂滑轮组合，13倍率。
The lifting load 70t with a * followed is available only when the boom sheave block is used together with the auxiliary sheave, with 13 parts of line.

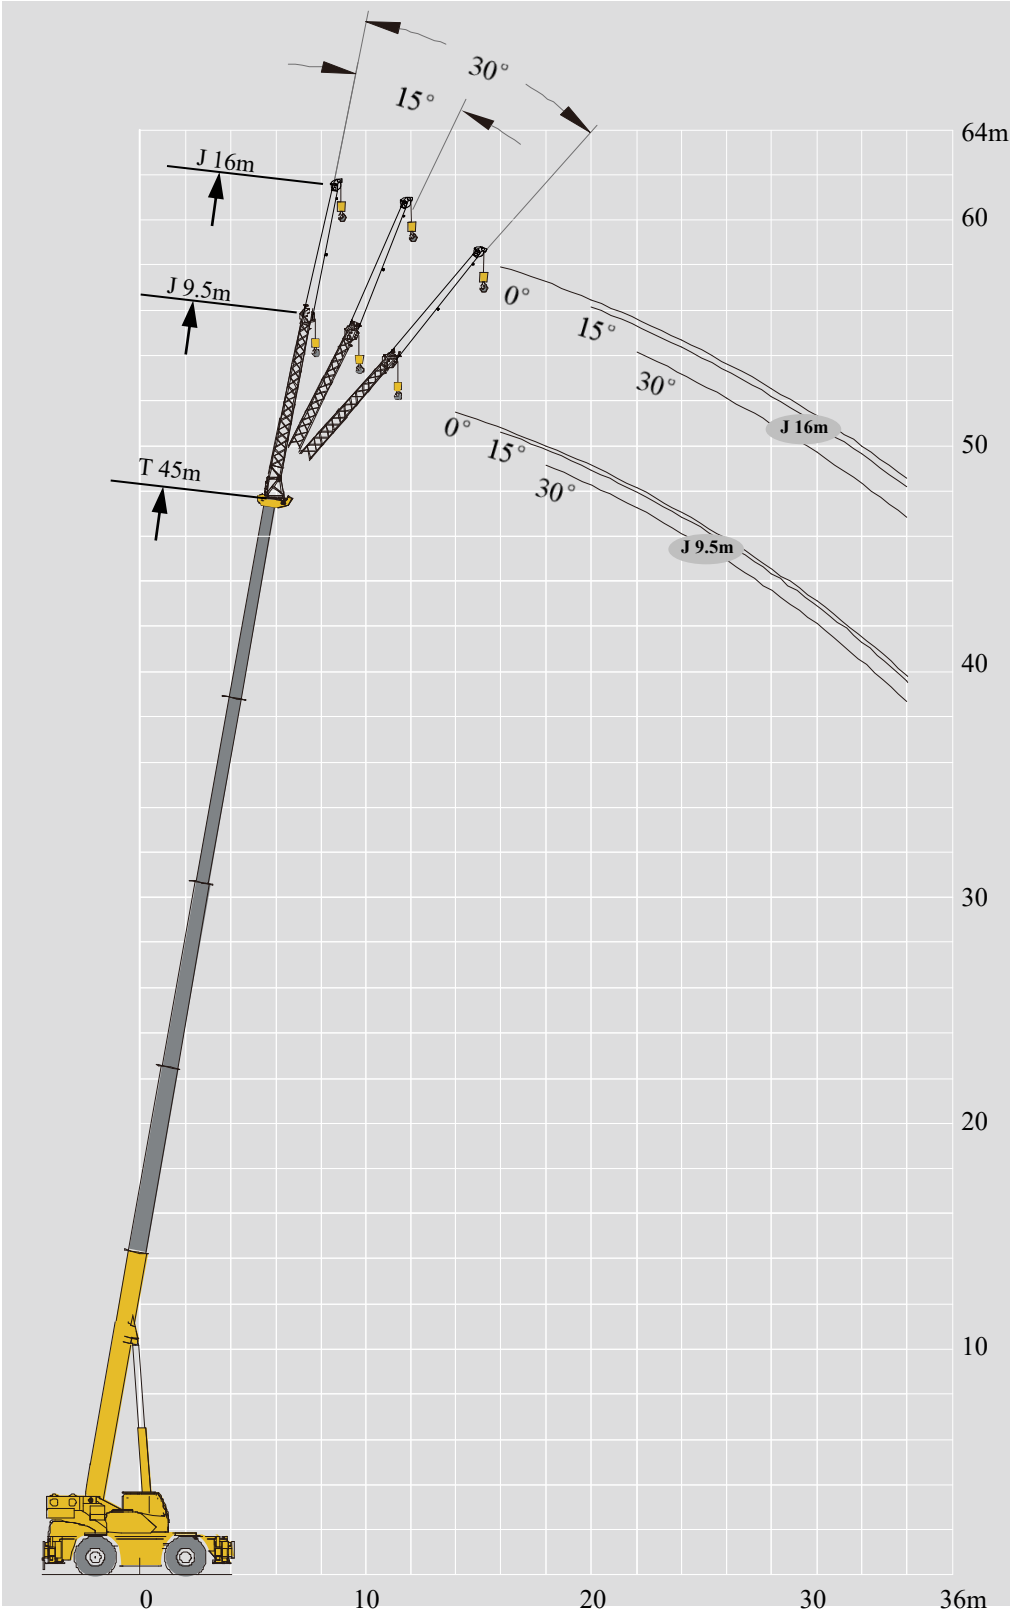

起重性能表
Lifting capacities

J 9.5-16m

45 m T 9.5m J 7.4m×7.4 m 360° 9t				
45 m+9.5m				
	0°	15°	30°	
14	4.5			14
16	4.4	3.1		16
18	4.1	3.0	1.8	18
20	3.7	3.0	1.9	20
22	3.2	2.8	1.7	22
24	2.8	2.6	1.6	24
26	2.5	2.5	1.7	26
28	2.2	2.3	1.6	28
30	1.8	2.0	1.4	30
32	1.4	1.6	1.6	32
34	1.0	1.2	1.3	34


45 m T 16m J 7.4m×7.4 m 360° 9t				
45 m+16m				
	0°	15°	30°	
16	2.9			16
18	2.8			18
20	2.6	1.9		20
22	2.5	1.8	1.3	22
24	2.3	1.6	1.3	24
26	2.1	1.5	1.2	26
28	1.9	1.4	1.1	28
30	1.8	1.3	1.1	30
32	1.6	1.2	1.1	32
34	1.4	1.2	1.0	34

符号标识

Description of symbols

常规标识

Symbols

	支腿 Outriggers		车桥 Axle
	工作幅度 Radius		行驶速度 Driving speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	吊臂长度 Boom length		轮胎 Tires
	吊钩 Hook block		平衡重 Counterweight
	360°全回转 360° operation of the boom		上车 Superstructure
	卷扬 Winch		底盘 Chassis

起重作业标识

Crane specific symbols

	主臂 Boom		副臂 Jib
--	------------	---	-----------

主要技术参数表

Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter
尺寸参数 Dimensions	外形尺寸（长×宽×高） Outline dimenison（length×width×height）		mm	14162×3290×3795
	轴距 Wheel base		mm	4000
	轮距（前/后） Track（Front/ Rear）		mm	2520/2520
	前悬/后悬 Front/ Rear overhang		mm	2040/2245
	前伸/后伸 Front/ Rear extension		mm	5877/0
重量参数 Weight	整车总重量 Gross vehicle weight		kg	46755（9t平衡重） （9t counterweight）
	轴荷 Axle load	一轴 1st axle	kg	24252
		二轴 2nd axle	kg	22503
动力参数 Power	发动机型号 Engine model		——	QSB6.7-C260-30
	额定功率/转速 Engine rated power/rpm		kW/(r/min)	194/2200
	最大输出扭矩/转速 Engine rated torque/rpm		N.m/(r/min)	900/1500
行驶参数 Travel	最高车速 Max. travel speed		km/h	≥38
	最低稳定车速 Min. travel speed		km/h	1.8
	最小转弯直径 Min. turning diameter		m	≤13
	最小离地间隙 Min. ground clearance		mm	508
	接近角 Approach angle		°	23
	离去角 Departure angle		°	20
	制动距离（制动初速度为24km/h） Braking distance（at 24 km/h）		m	≤9
	最大爬坡能力 Max. grade ability		%	≥70

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter	
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity		t	70	
	最小额定工作幅度 Min. rated working radius		m	2.5	
	转台尾部回转半径 Turning radius at turntable tail	平衡重处 Counterweight	mm	4200	
	最大起重力矩 Max. load moment	基本臂 Base boom	kN.m	2028.6	
		最长主臂 Fully-extended boom	kN.m	1223	
	支腿跨距 Outrigger span	纵向 Longitudinal	m	7.4	
		横向 Lateral	m	7.4	
	起升高度 Hoist height	基本臂 Base boom	m	12.8	
		最长主臂 Fully-extended boom	m	45.3	
		最长主臂+副臂 Fully-extended boom + Jib	m	57.9	
	起重臂长度 Boom length	基本臂 Base boom	m	11.8	
		最长主臂 Fully-extended boom	m	45	
		最长主臂+副臂 Fully-extended boom + Jib	m	61	
	副臂安装角 Jib offset angle		°	0°, 15°, 30°	
工作速度参数 Working speed	起重臂起臂时间 Boom raising time		s	≤50	
	起重臂全伸时间 Boom fully extending time		s	≤90	
	最大回转速度 Max. slewing speed		r/min	≥1.5	
	支腿收放时间Outrigger extending and retracting time	水平支腿 Outrigger beam	收 Retracting	s	≤20
			放 Extending	s	≤35
		垂直支腿 Outrigger jack	收 Retracting	s	≤30
			放 Extending	s	≤35
	起升速度（单绳,第四层, 空载） Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch	m/min	≥150	
		副起升机构 Auxiliary winch	m/min	≥90	

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom should be extended according to the telescoping code shown by digits, which means the percentage of boom sections extended.



地址: 江苏省徐州市经济技术开发区高新路68号

Add: No. 68 Gaoxin Road, Economic and Technological
Development Zone, Xuzhou, Jiangsu, China

电话(Tel): +86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel): +86-516-87888268

备件电话(Spare Parts Tel): +86-516-83461542

邮编(Post Code): 221004

网址(Web): www.xcmg.com

服务热线 Service Tel

400-110-9999



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.

XCMG—XCR70H